

# 28W 1500MM WARWICK T8 ROTATIONAL POULTRY TUBE

## WITH ROTATABLE ENDS, CABLE AND MALE AND FEMALE CONNECTORS

50% SAVINGS  
COMPARED TO  
TRADITIONAL  
LIGHTING

ROTATABLE TO  
DIRECT LIGHT  
TO WHERE IT  
IS NEEDED

IMPROVES  
FOOD  
CONSUMPTION  
RATE BY 3%

0-100%  
DIMMABLE  
TO SIMULATE  
SUNRISE AND  
SUNSET

FLICKER  
FREE

5 YEAR  
TOTAL  
PRODUCT  
WARRANTY



### FEATURES AND BENEFITS

- FLICKER FREE REDUCES STRESS AND PECKING AND IMPROVES RESISTANCE TO DISEASE
- INCREASES MUSCULOSKELETAL DEVELOPMENT AND WEIGHT GAIN BY 5% (5000K)
- ENCOURAGES SEXUAL DEVELOPMENT (2700K)
- CONTROLS ONSET AND OPTIMISES EGG PRODUCTION (2700K)
- IMPROVES THE PERSISTANCE OF LAY (2700K)
- IP66 STRUCTURALLY WATERPROOF WITHOUT GLUE, DUSTPROOF AND IMPACT RESISTANT
- ROTATABLE ENDS GIVE PRECISE LIGHT DIRECTION

### PRODUCT INFORMATION

Input: 180-240VAC 50/60Hz  
Output Current: 520mA  
Product Size (mm): 1500L x 28D  
Luminous Flux: 3500 lm  
Lumen Per Watt: 125 lm

Inrush Current: 9A  
Flicker Free: (Hz): 0  
Dimmable: 0.2-100%  
Surge Protection Voltage: 2000V  
Cable (mm): 2 X 1.00<sup>2</sup>

### PRODUCT VARIATIONS

- GL7007** With rotatable ends and double ended 1m cable and connectors (5000K) Diffused  
**GL7008** With rotatable ends and double ended 1m cable and connectors (2700K) Diffused  
**GL7009** With rotatable ends and single ended 1m cable and male connector (5000K) Diffused  
**GL7010** With rotatable ends and single ended 1m cable and male connector (2700K) Diffused

### PACKING INFORMATION


Weight (kg): 1 (GL7007, GL7008); 0.8 (GL7009, GL7010)




# 28W 1500MM WARWICK T8 INLINE POULTRY TUBE WITH ROTATABLE ENDS, CABLE AND MALE AND FEMALE CONNECTORS

## SPECTRAL DISTRIBUTION DIAGRAM

5000K

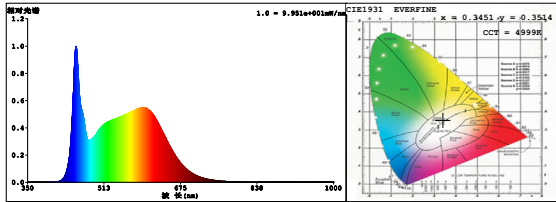


2700K

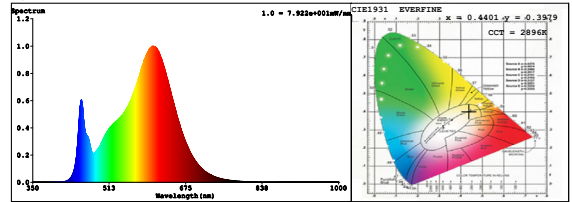


## LUMINOUS INTENSITY DIAGRAM

5000K

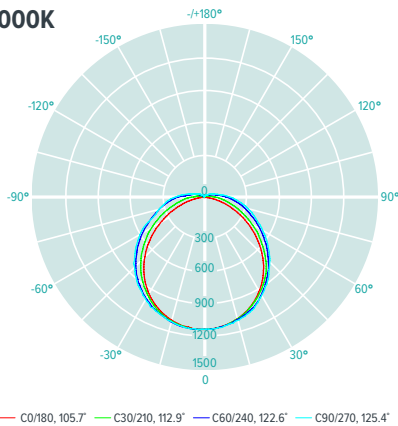


2700K

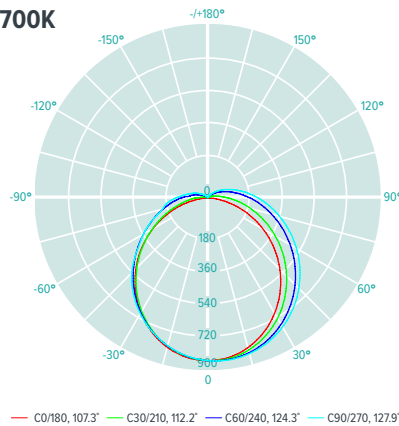


## LUX LEVEL DIAGRAM

5000K

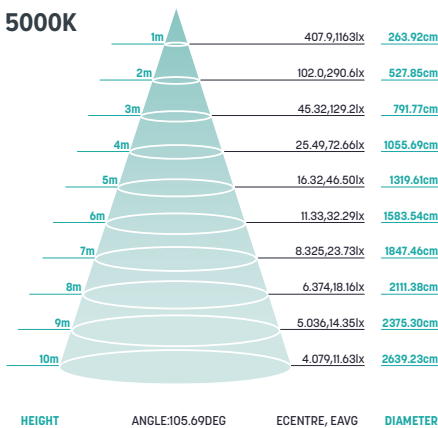

2700K

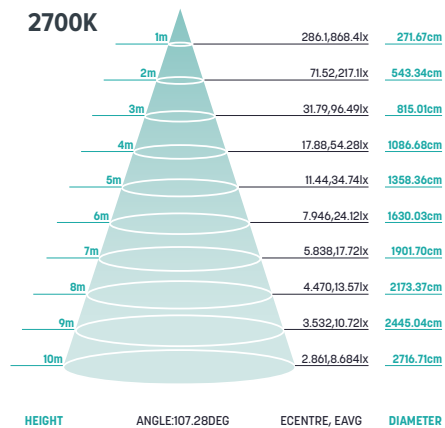

5 YEAR TOTAL PRODUCT WARRANTY

