

28W 1500MM ALNWICK T12 POULTRY TUBE LIGHT

WITH DOUBLE ENDED 1M CABLE/SINGLE ENDED 0.5M DIFFUSED

50% SAVINGS
COMPARED TO
TRADITIONAL
LIGHTING

REDUCES
MORTALITY
BY 2%

IMPROVES
FOOD
CONSUMPTION
RATE BY 3%

0-100%
DIMMABLE
TO SIMULATE
SUNRISE AND
SUNSET

FLICKER
FREE 0Hz

5 YEAR
TOTAL
PRODUCT
WARRANTY



FEATURES AND BENEFITS

- FLICKER FREE 0Hz REDUCES STRESS AND PECKING AND IMPROVES RESISTANCE TO DISEASE
- INCREASES MUSCULOSKELETAL DEVELOPMENT AND WEIGHT GAIN BY 5% (5000K)
- ENCOURAGES SEXUAL DEVELOPMENT (2700K)
- CONTROLS ONSET AND OPTIMISES EGG PRODUCTION (2700K)
- IMPROVES THE PERSISTANCE OF LAY (2700K)
- IP67 WATERPROOF, DUSTPROOF AND IMPACT RESISTANT

PRODUCT INFORMATION

Input: 180-240VAC 50/60Hz
Output Current: 550mA
Product Size (mm): 1500L x 32D
Inrush Current: 6A
Flicker Free: (Hz): 0
Dimmable: 1-100%

PACKING INFORMATION

Weight (kg): 1 (GL7019, GL7021); 0.8 (GL7027, GL7029)

PRODUCT VARIATIONS

- GL7019** 28W 1500mm Alnwick T12 Inline Poultry Tube with double ended 1m cable (5000K) Diffused
GL7021 28W 1500mm Alnwick T12 Inline Poultry Tube with double ended 1m cable (2700K) Diffused
GL7027 28W 1500mm Alnwick T12 Inline Poultry Tube with single ended 0.5m cable (5000K) Diffused
GL7029 28W 1500mm Alnwick T12 Inline Poultry Tube with single ended 0.5m cable (2700K) Diffused

ADDITIONAL PRODUCTS

GL7039 3m Tube Suspension Kit (2pcs)




28W 1500MM ALNWICK T12 POULTRY TUBE LIGHT


WITH DOUBLE ENDED 1M CABLE/SINGLE ENDED 0.5M DIFFUSED

SPECTRAL DISTRIBUTION DIAGRAM

5000K

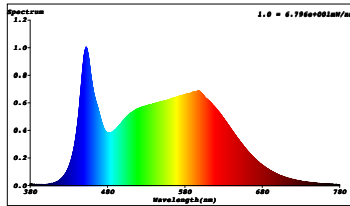


2700K

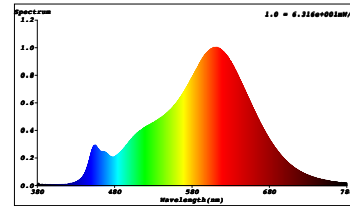


LUMINOUS INTENSITY DIAGRAM

5000K

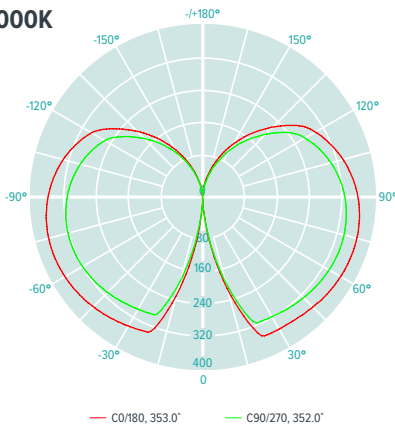


2700K

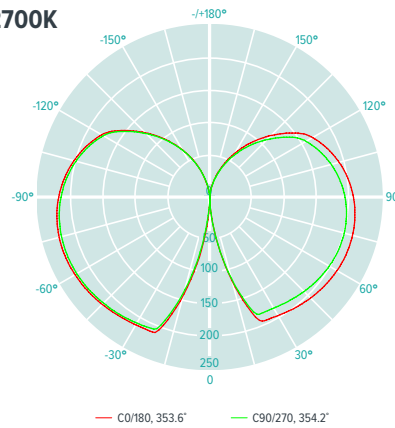


LUX LEVEL DIAGRAM

5000K

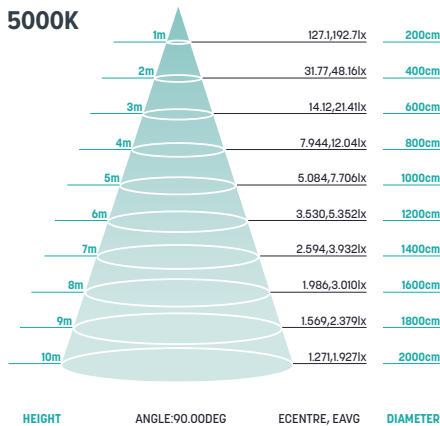

2700K

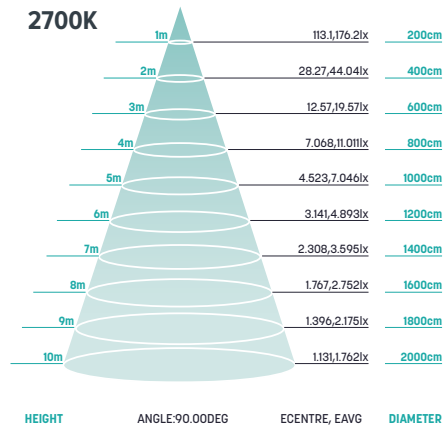

5 YEAR TOTAL PRODUCT WARRANTY

