

12W 840-960LM CENTURION TUNEABLE WHITE DIMMABLE DOWNLIGHTER 3000K- 5000K

12W DIMMABLE
& 3000K-
5000K
TUNEABLE
WHITE

INCLUDES 2
ADDITIONAL
METAL BEZELS

NOW IP65
RATED

FIRE RATED
UP TO 90
MINS

UP TO 100
DOWNLIGHTERS
CONTROLLED
PER CHANNEL
ON REMOTE

3 YEAR
TOTAL
PRODUCT
WARRANTY



FEATURES AND BENEFITS

- 12W DIMMABLE
- 3000K - 5000K TUNEABLE WHITE
- INCLUDES 2 ADDITIONAL METAL BEZELS, POLISHED CHROME AND SATIN NICKEL
- IP65 AND FIRE RATED UP TO 90 MINUTES
- HIGH QUALITY DIE CAST ALUMINIUM IN WHITE FINISH
- DIMMABLE DOWN TO 10% BY REMOTE CONTROL OR 3% USING NIGHTLIGHT MODE BY WALLSWITCH
- SEPARATE REMOTE CONTROLS UP TO 400 DOWNLIGHTERS IN 4 INDIVIDUALLY SWITCHED CIRCUITS; UP TO 100 DOWNLIGHTERS PER CHANNEL

PRODUCT INFORMATION

LED Lifespan: 50,000 Hours
 Product Size (mm): 108D x 42H
 Hole Size (mm): 90
 Input: AC200V-264V~50Hz~60Hz
 Output Current: 550mA
 Inrush Current: < 30A
 Operating Temperature: -20 °C~ +45 °C
 Product Materials: Aluminium
 Complete With: Polished Chrome & Satin Nickel Metal Bezels

AX499/GL7499

White with Polished Chrome and Satin Nickel Bezels
Luminous Flux: 840 lm (3000K), 960 lm (4000K), 860lm (5000K)
Lumen Per Watt: 70 lm (3000K), 80 lm (4000K), 72 lm (5000K)
CCT: 3000K, 4000K, 5000K
PF: ≥0.8

PACKING INFORMATION

Weight (kg): 0.26

ADDITIONAL PRODUCTS


AX500/GL7500 Centurion Remote Control




12W 840-960LM CENTURION TUNEABLE WHITE DIMMABLE DOWNLIGHTER 3000K- 5000K

SPECTRAL DISTRIBUTION DIAGRAM


3000K

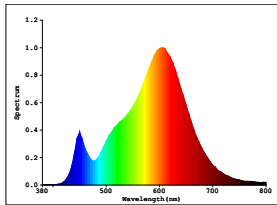

4000K

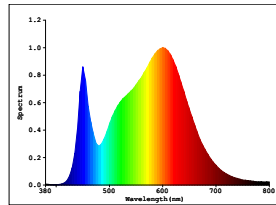


5000K

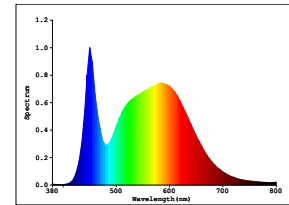


LUMINOUS INTENSITY DIAGRAM


3000K

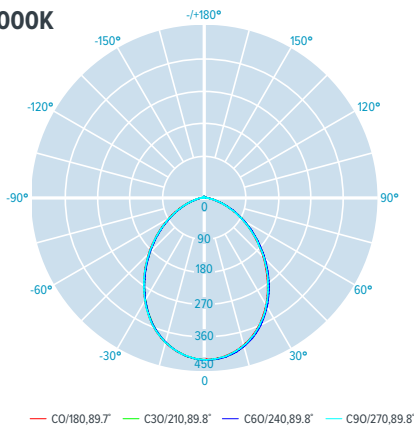

4000K

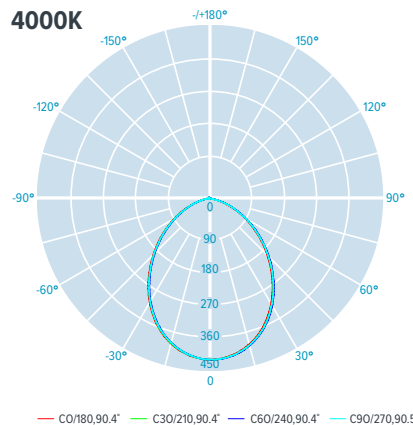


5000K

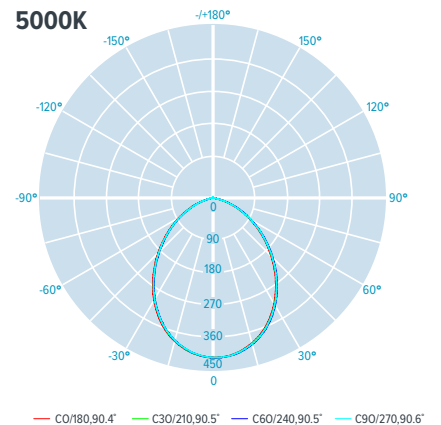


LUX LEVEL DIAGRAM


3000K

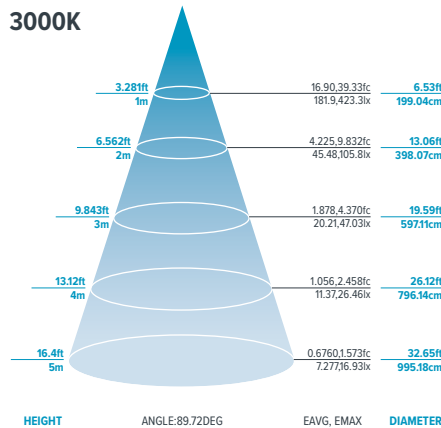

4000K

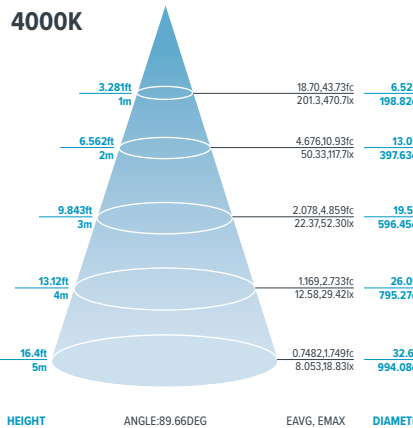

5000K

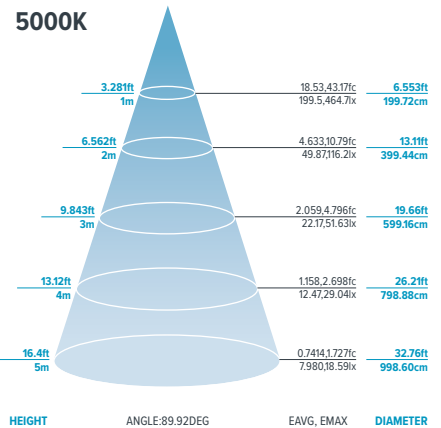

PLEASE NOTE THIS SPECIFICATION IS ON PRODUCTS SUPPLIED FROM AUGUST 2019 ONWARDS; THIS VARIES FROM PRODUCTS PREVIOUSLY SUPPLIED

3 YEAR TOTAL PRODUCT WARRANTY

