

# 25W 1500MM RABY T12 VERTICAL POULTRY TUBE (2700K) DIFFUSED

**50% SAVINGS  
COMPARED TO  
TRADITIONAL  
LIGHTING**

**REDUCES  
MORTALITY  
BY 2%**

**IMPROVES  
FOOD  
CONSUMPTION  
RATE BY 3%**

**0-100%  
DIMMABLE  
TO SIMULATE  
SUNRISE AND  
SUNSET**

**FLICKER  
FREE 0Hz**

**5 YEAR  
TOTAL  
PRODUCT  
WARRANTY**

## FEATURES AND BENEFITS

- ESPECIALLY DESIGNED FOR HANGING BETWEEN THE LAYING UNITS
- 360 DEGREE ILLUMINATION
- 4M LIGHT DISTANCE
- 2700K COLOUR TEMPERATURE ESPECIALLY FOR LAYERS
- CONTROLS LAY ONSET AND OPTIMISES EGG PRODUCTION
- IMPROVES THE PERSISTENCE OF LAY
- IP67 WATERPROOF, DUSTPROOF AND IMPACT RESISTANT








## PRODUCT INFORMATION

**Input:** 180-264VAC 50/60Hz  
**Output Current:** 570mA  
**Product Size (mm):** 1500L x 34D  
**Inrush Current:** 6A  
**Flicker Free: (Hz):** 0  
**Dimmable:** 1-100%  
**Ambient Operating Temperature:** -20°C - +55°C  
**Product Materials:** PC and Aluminium

**GL7049**  
 (2700K) Diffused  
**Luminous Flux:** 2614 lm  
**Lumen Per Watt:** 112 lm  
**CCT:** 2700K

## PACKING INFORMATION


**Weight (kg):** 0.8

 E27	<b>25 WATT</b>	 FLICKER FREE	<b>IP 67</b>	<b>IK 10</b>	 360°	 INDOOR USE
 OUTDOOR USE	 CRI <b>85</b>	<b>PF 0.9</b>	 DIMMABLE	<b>LM-80 TESTED</b>		




# 25W 1500MM RABY T12 VERTICAL POULTRY TUBE (2700K) DIFFUSED


## SPECTRAL DISTRIBUTION DIAGRAM

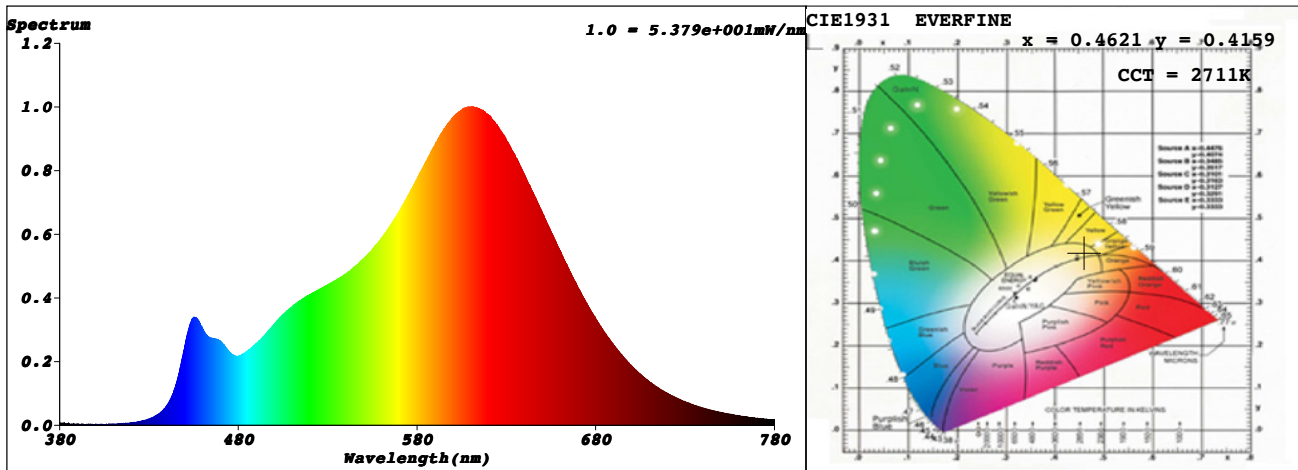

## LUMINOUS INTENSITY DIAGRAM

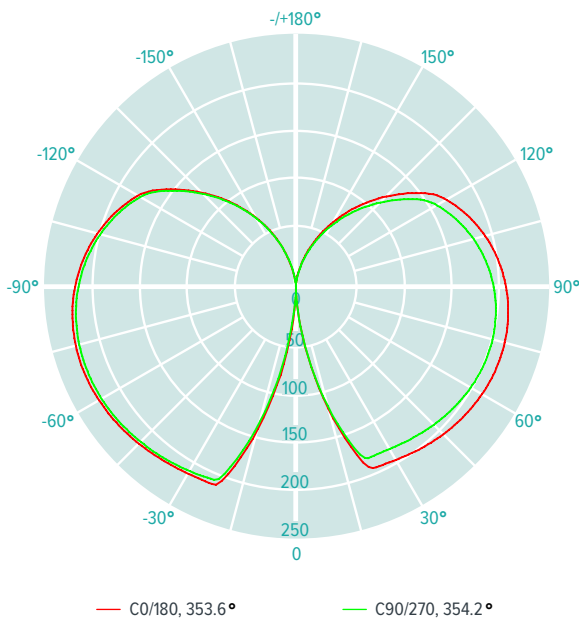

## LUX LEVEL DIAGRAM

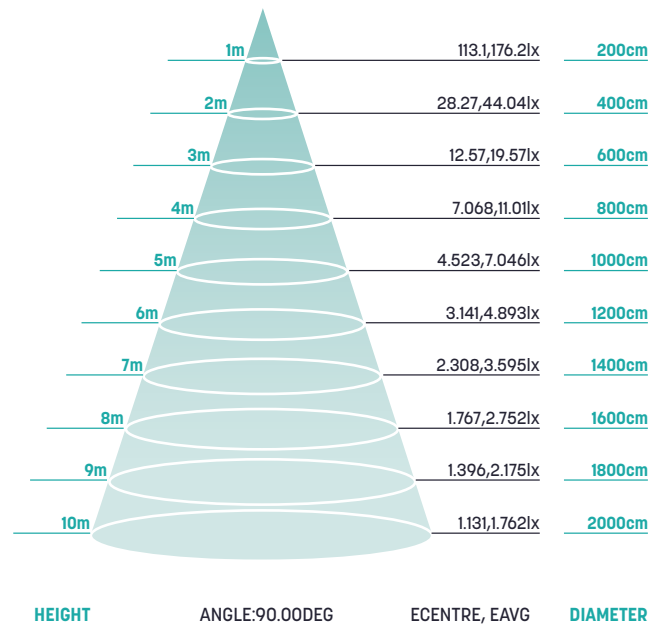

**5** YEAR  
TOTAL  
PRODUCT  
WARRANTY

