

28W 1500MM BALMORAL T8 SLIMLINE FAST FIX LINKABLE POULTRY TUBE LIGHT WITH ROTATABLE CAPS

IDEAL FOR STOCKING


ROTATABLE TO DIRECT LIGHT TO WHERE IT IS NEEDED

AMMONIA AND ACID RESISTANT

QUICK AND EASY CABLE CONNECTION TO TUBE

IP67 TUBE AND IP68 CONNECTOR

5 YEAR TOTAL PRODUCT WARRANTY

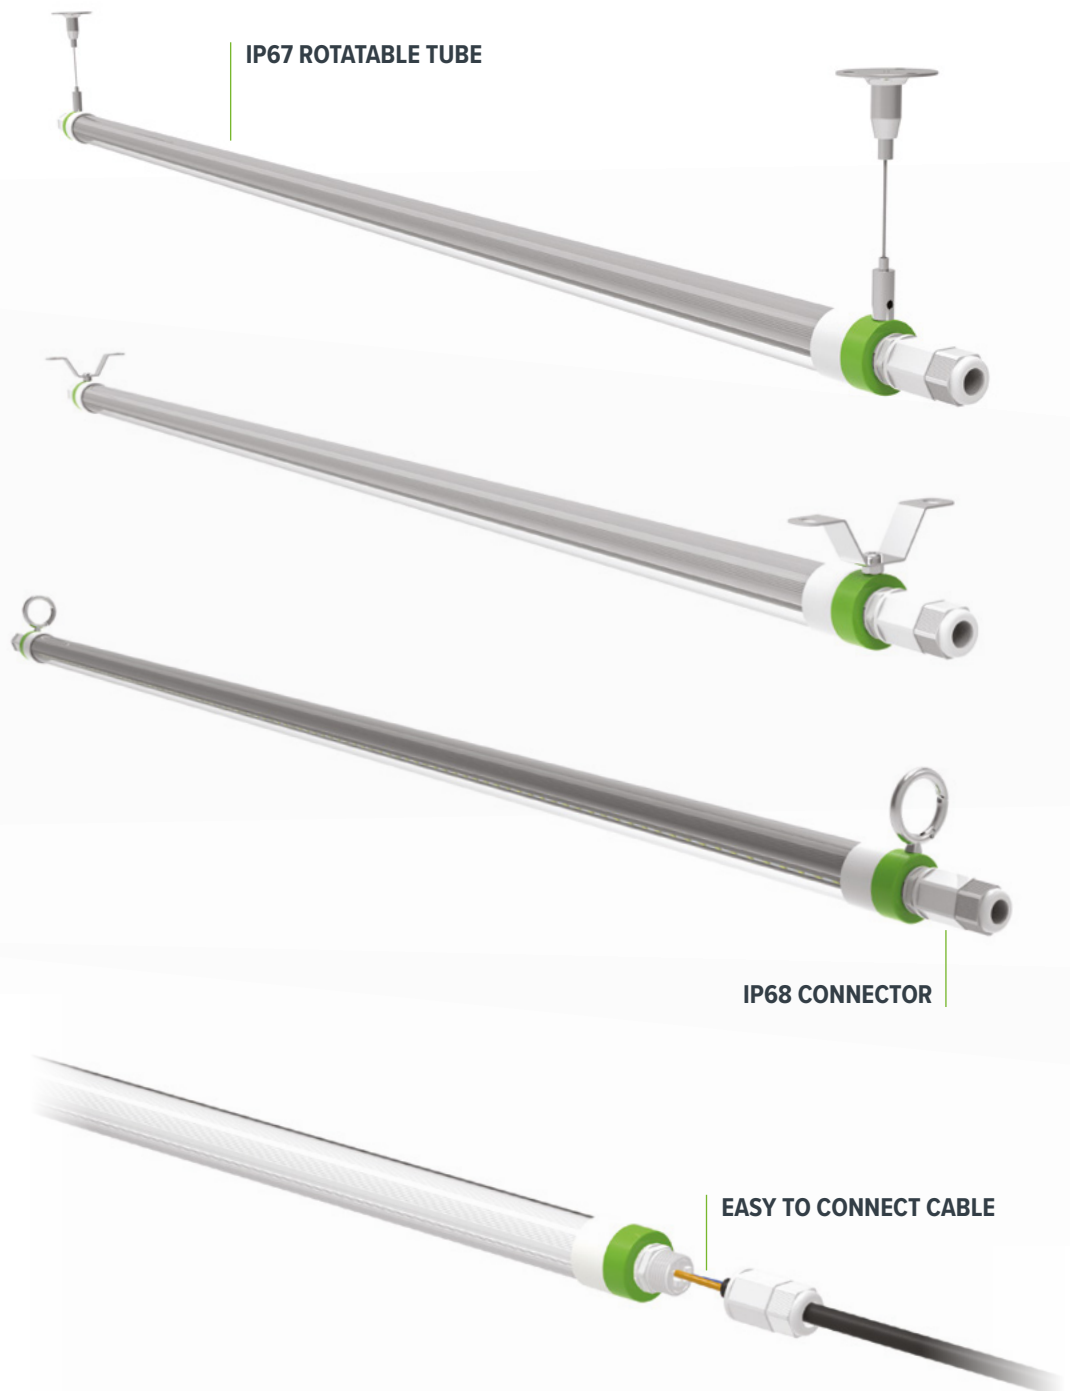

28W 1500MM BALMORAL T8 SLIMLINE FAST FIX LINKABLE POULTRY TUBE LIGHT WITH ROTATABLE CAPS

V-SHAPE DESIGN, 150° BEAM

V-Shape Design provides wider beam angle and more uniform lighting distribution.

IP67 STRUCTURAL WATERPROOFING

IP67 Structurally waterproof can withstand the high-pressure water cleaning.

WORLD-LEADING TRIAC DIMMING TECHNOLOGY

Flicker-free smooth Dim-to-0.2% technology provides a perfect simulation of sunrise and sunset for livestock farming application.

MORE LIGHT, LESS ENERGY

High lighting efficiency, up to 140-150lm/w.

OVER 80,000 HOURS LIFESPAN, 5 YEARS WARRANTY

IP68 FAST-FIT CONNECTORS

Convenient fast-fit connectors allow for a simple, quick linkable installation.

PATENT 270° ALUMINIUM HEAT SINK DESIGN

Patent Designed 270° aluminium heat sink provides ample cooling to ensure longer lifetime and allows the lamp to run in hot environments.

PATENT ROTATING END-CAP DESIGN

360° rotating end cap, available to adjust the lighting direction according to specific needs.

AMMONIA AND ACID RESISTANCE

Superior outer shell is specially designed to withstand the hard farm environment filled with ammonia and acid.

50% ENERGY SAVINGS COMPARED TO TRADITIONAL LIGHTING

IMPROVES FOOD CONSUMPTION RATE BY 3%

0-100% DIMMABLE TO SIMULATE SUNRISE AND SUNSET

FLICKER FREE

5 YEAR TOTAL PRODUCT WARRANTY

28W 1500MM BALMORAL T8 SLIMLINE FAST FIX LINKABLE POULTRY TUBE LIGHT WITH ROTATABLE CAPS

FEATURES AND BENEFITS

- Increases Musculoskeletal development and weight gain by 5% (5000K)
- Encourages sexual development (2700K)
- Controls onset and optimises egg production (2700K)
- Improves the persistence of lay (2700K)
- V-shape design provides wider 150° beam angle and more uniform lighting distribution
- IP67 structural waterproofing can withstand high-pressure water cleaning
- Convenient IP68 fast-fit connectors allow for a simple, quick linkable installation
- Flicker-free smooth dim-to-0.2% technology provides a perfect simulation of sunrise and sunset for livestock farming application
- More light, less energy - high lighting efficiency up to 120lm/w
- 360° patent rotating end-cap design, available to adjust the lighting direction according to specific needs
- Patent 270° aluminium heat sink design provides ample cooling to ensure longer lifetime and allows the lamp to run in hot environments
- Over 80,000 hours lifespan, 5 years warranty
- Ammonia and acid resistant outer shell specially designed to withstand the hard farm environment

TECHNICAL DATA

Weights: 0.5KG

Input Voltage/Hz: AC220-240V 50/60Hz

Output Current: 0.12A

Lumen Output: 3080lm/2700K 3640lm/5000K

Lm/W: 110LM/W/2700K 120LM/W/5000K

Inrush Current: 6.5A

Surge Protection Voltage: 1KV

Product size: 1602MMX31.8MM

PRODUCT VARIATIONS

GL7013 28W 1500mm Balmoral T8 Fast Fix Slimline Linkable Poultry Tube with Rotatable Caps Double Ended 5000K (Diffused)


GL7015 28W 1500mm Balmoral T8 Fast Fix Slimline Linkable Poultry Tube with Rotatable Caps Double Ended 2700K (Diffused)




28W 1500MM BALMORAL T8 SLIMLINE FAST FIX LINKABLE POULTRY TUBE LIGHT WITH ROTATABLE CAPS

SPECTRAL DISTRIBUTION DIAGRAM

5000K

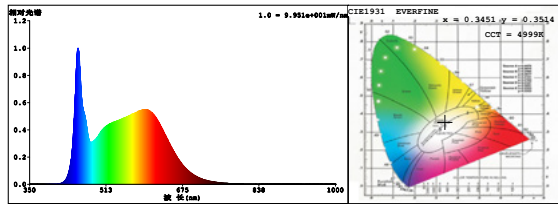


2700K

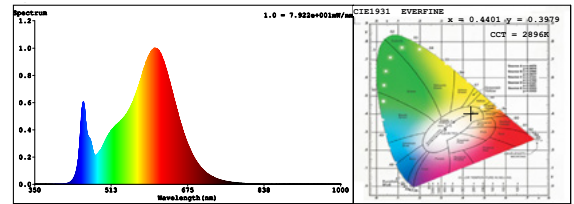


LUMINOUS INTENSITY DIAGRAM

5000K

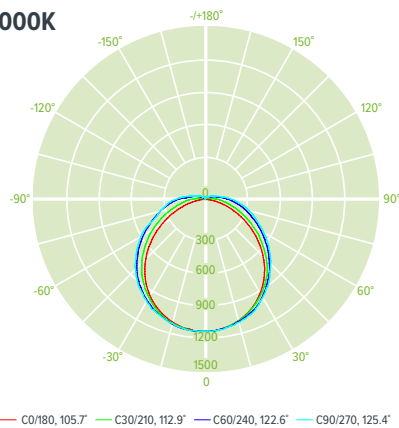


2700K

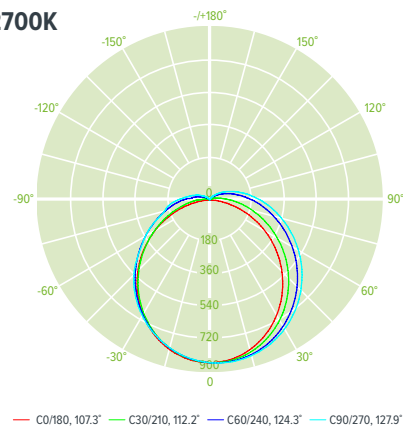


LUX LEVEL DIAGRAM

5000K

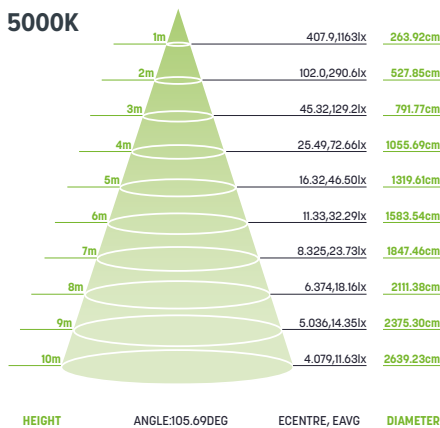

2700K

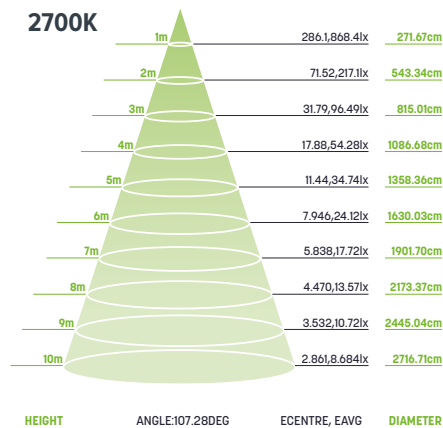

5 YEAR TOTAL PRODUCT WARRANTY

